

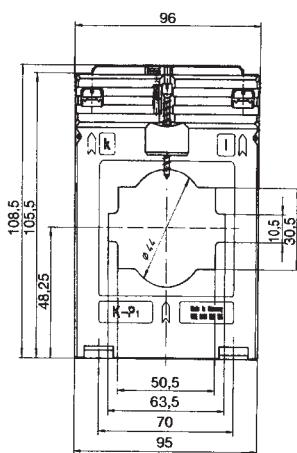




ASK 61.4

Plug-in current transformer





Primary conductor	63 x 10 mm 2 x 50 x 10 mm
Round conductor	Ø 44 mm
Transformer width	96 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Protection plug-in current transformer	see page 148
Current transformer for tariff applications	see page 182

Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		1	0.5	0.2s	1	0.5
200	1.5	19047	19009		19247	19209
	2.5	19048	19010		19248	19210
250	1.5	19049	19011	V41-1804C	19249	19211
	2.5	19050	19012	V41-1804D	19250	19212
	5				19175	
300	1.5	19051	19013		19251	19213
	2.5	19052	19014	V41-1904D	19252	19214
	5	19053	19015	V41-1904F	19253	19215
400	1.5	19054	19016		19254	19216
	2.5	19055	19017	V41-2004D	19255	19217
	5	19056	19018	V41-2004F	19256	19218
	10	19057	19094	V41-2004H	19257	19294
500	1.5		19019			19219
	2.5	19058	19020	V41-2104D	19258	19220
	5	19059	19021	V41-2104F	19259	19221
	10	19060	19095	V41-2104H	19260	19295
	15	19061	19096		19261	19296
600	2.5	19062	19022	V41-2204D	19262	19222
	5	19063	19023	V41-2204F	19263	19223
	10	19064	19024	V41-2204H	19264	19224
	15	19065	19097	V41-2204J	19265	19297
750	2.5	19066	19025	V41-2304D	19266	19225
	5	19067	19026	V41-2304F	19267	19226
	10	19068	19027	V41-2304H	19268	19227
	15	19069	19098	V41-2304J	19269	19298
800	2.5	19070	19028		19270	19228
	5	19071	19029		19271	19229
	10	19072	19030		19272	19230
	15	19073	19031		19273	19231
1000	2.5			V41-2504D		
	5	19074	19032	V41-2504F	19274	19232
	10	19075	19033	V41-2504H	19275	19233
	15	19076	19034	V41-2504J	19276	19234
	30	19077	19099		19277	19299
1200	2.5			V41-2604D		
	5	19078	19035	V41-2604F	19278	19235
	10	19079	19036	V41-2604H	19279	19236
	15	19080	19037	V41-2604J	19280	19237
	30	19081	19100		19281	19300
1250	5	19082	19038	V41-2704F	19282	19238
	10	19083	19039	V41-2704H	19283	19239
	15	19084	19040	V41-2704J	19284	19240
	30	19085	19101		19285	19301
1500	5	19086	19041	V41-2804F	19286	19241
	10	19087	19042	V41-2804H	19287	19242
	15	19088	19043	V41-2804J	19288	19243
	30	19089	19102		19289	19302
1600	5	19090	19044		19290	19244
	10	19091	19045		19291	19245
	15	19092	19046		19292	19246
	30	19093	19103		19293	19303




ASK 61.4 2U

Plug-in current transformer



Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		1	1
500-250	5-2.5	19141	19341
600-300	5-2.5	19142	19342
	10-5	19143	19343
800-400	5-2.5	19144	19344
	10-5	19145	19345
	15-7.5	19146	19346
1000-500	5-2.5	19147	19347
	10-5	19148	19348
	15-7.5	19149	19349
1200-600	5-2.5	19150	19350
	10-5	19151	19351
	15-7.5	19152	19352
1500-750	5-2.5	19153	19353
	10-5	19154	19354
	15-7.5	19155	19355
	30-15	19156	19356
1600-800	5-2.5	19157	19357
	10-7.5	19158	19358
	15-7.5	19159	19359
	30-15	19160	19360

ASK 61.4 3U

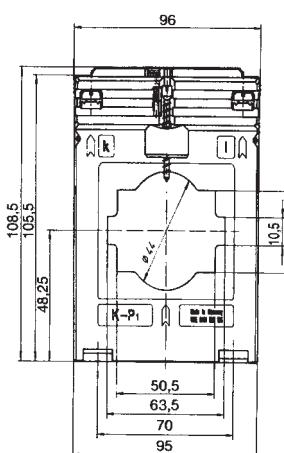

Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		1	1
800-400-200	10-5-2.5	19182	19382
1000-500-250	10-5-2.5	19183	19383
	15-7.5-2.5	19184	19384
1000-600-300	10-5-2.5	19185	19385
	15-7.5-2.5	19186	19386
1200-600-300	10-5-2.5	19187	19387
	15-7.5-2.5	19188	19388
1500-750-400	10-5-2.5	19189	19389
	15-7.5-2.5	19190	19390
1600-800-400	10-5-2.5	19191	19391
	15-7.5-2.5	19192	19392
1000-600-400	10-5-2.5	19199	19399

Primary conductor	63 x 10 mm 2 x 50 x 10 mm
Round conductor	Ø 44 mm
Transformer width	96 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Protection plug-in current transformers	see page 148